



CWT Frame


1:1 Single Row




2:1 Double Row



2:1 Single Row

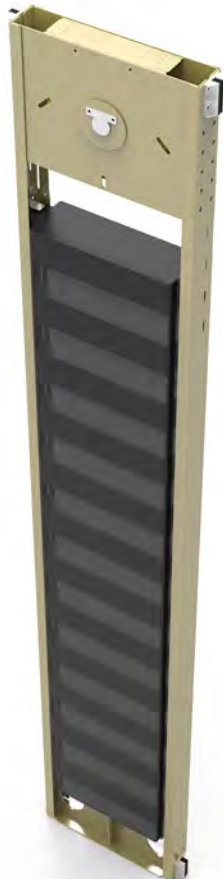

2:1 Single Row Belt

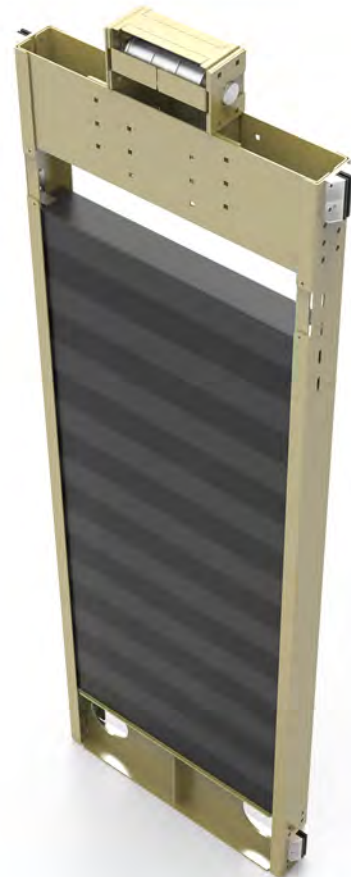



1:1 Single Row CWT Frame

3D View



1:1 Single Row CWT Frame

2D View

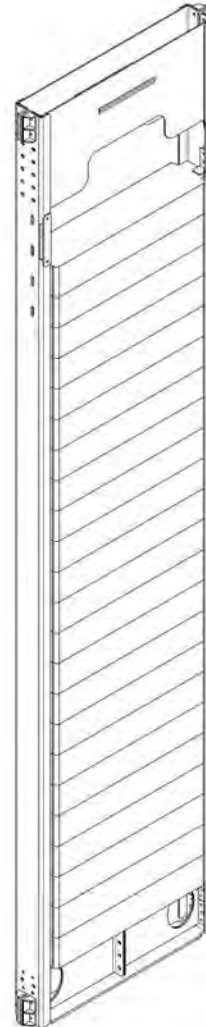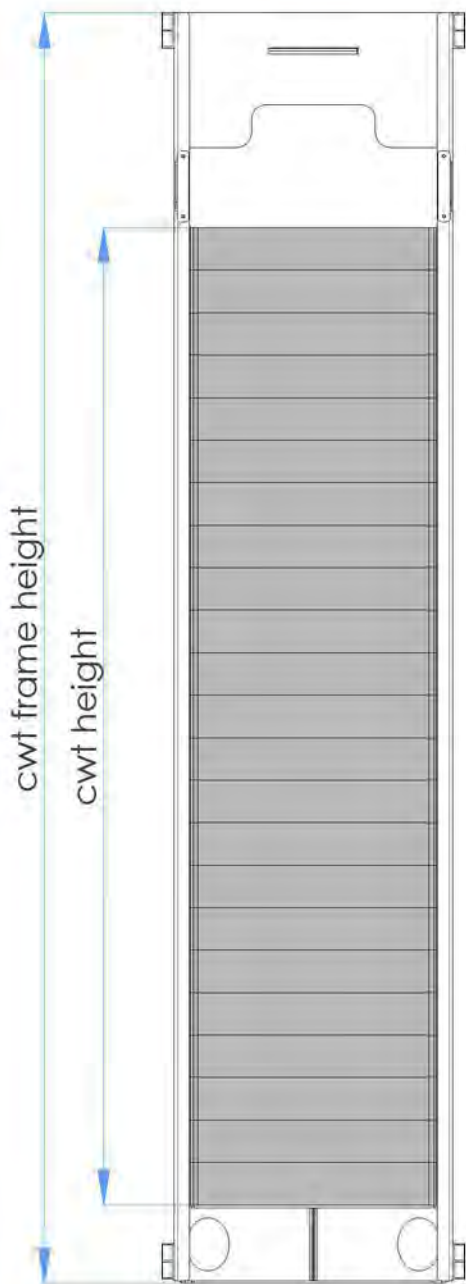

please check the dimensions at our technical tables.



2:1 Double Row CWT Frame

3D View



2:1 Double Row CWT Frame

2D View

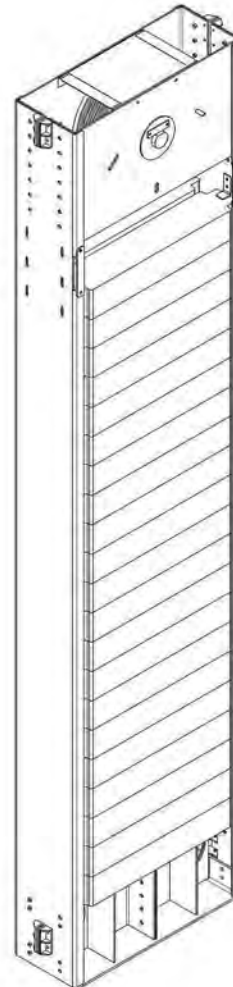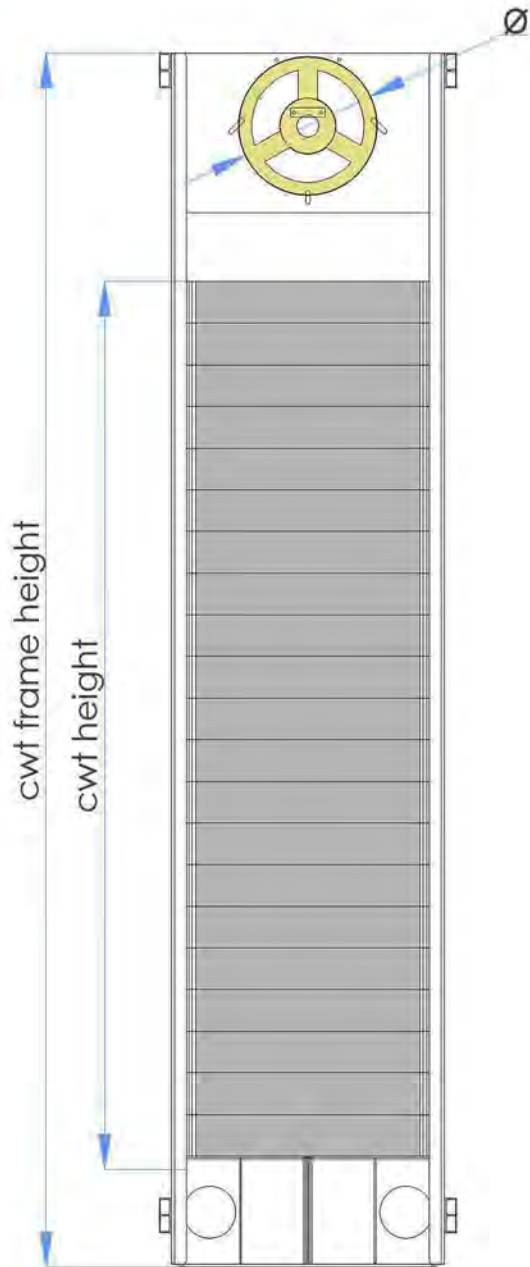

please check the dimensions at our technical tables.




2:1 Single Row CWT Frame

3D View



2:1 Single Row CWT Frame


2D View

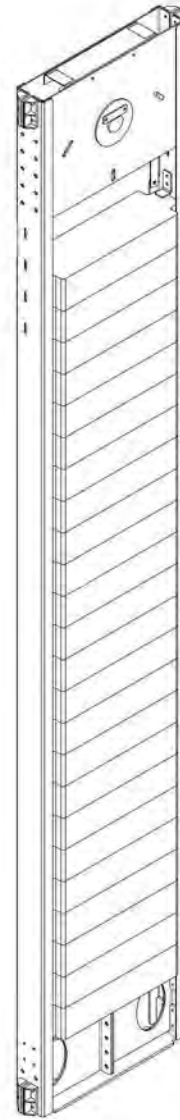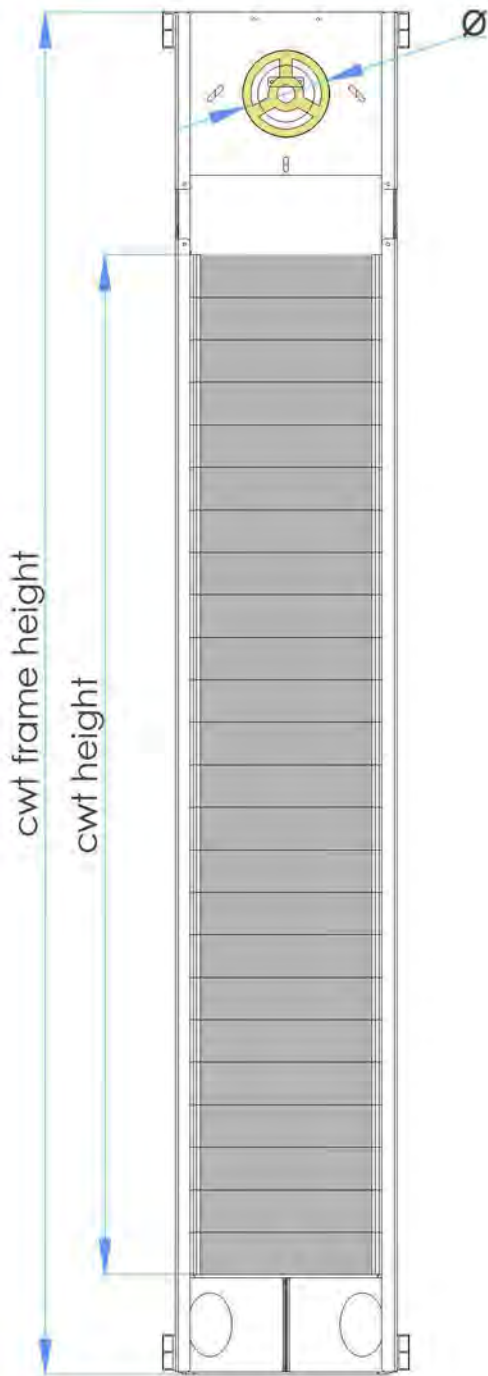


please check the dimensions at our technical tables.

2:1 Single Row-Belt CWT Frame

3D View

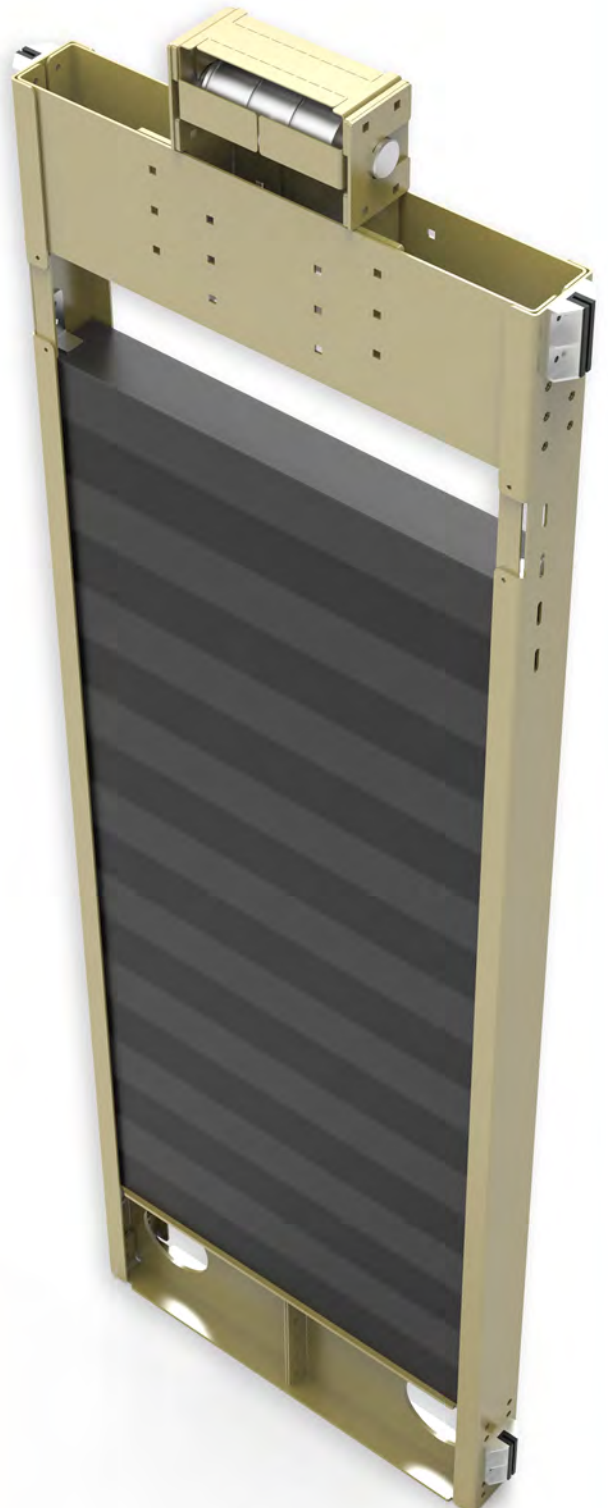

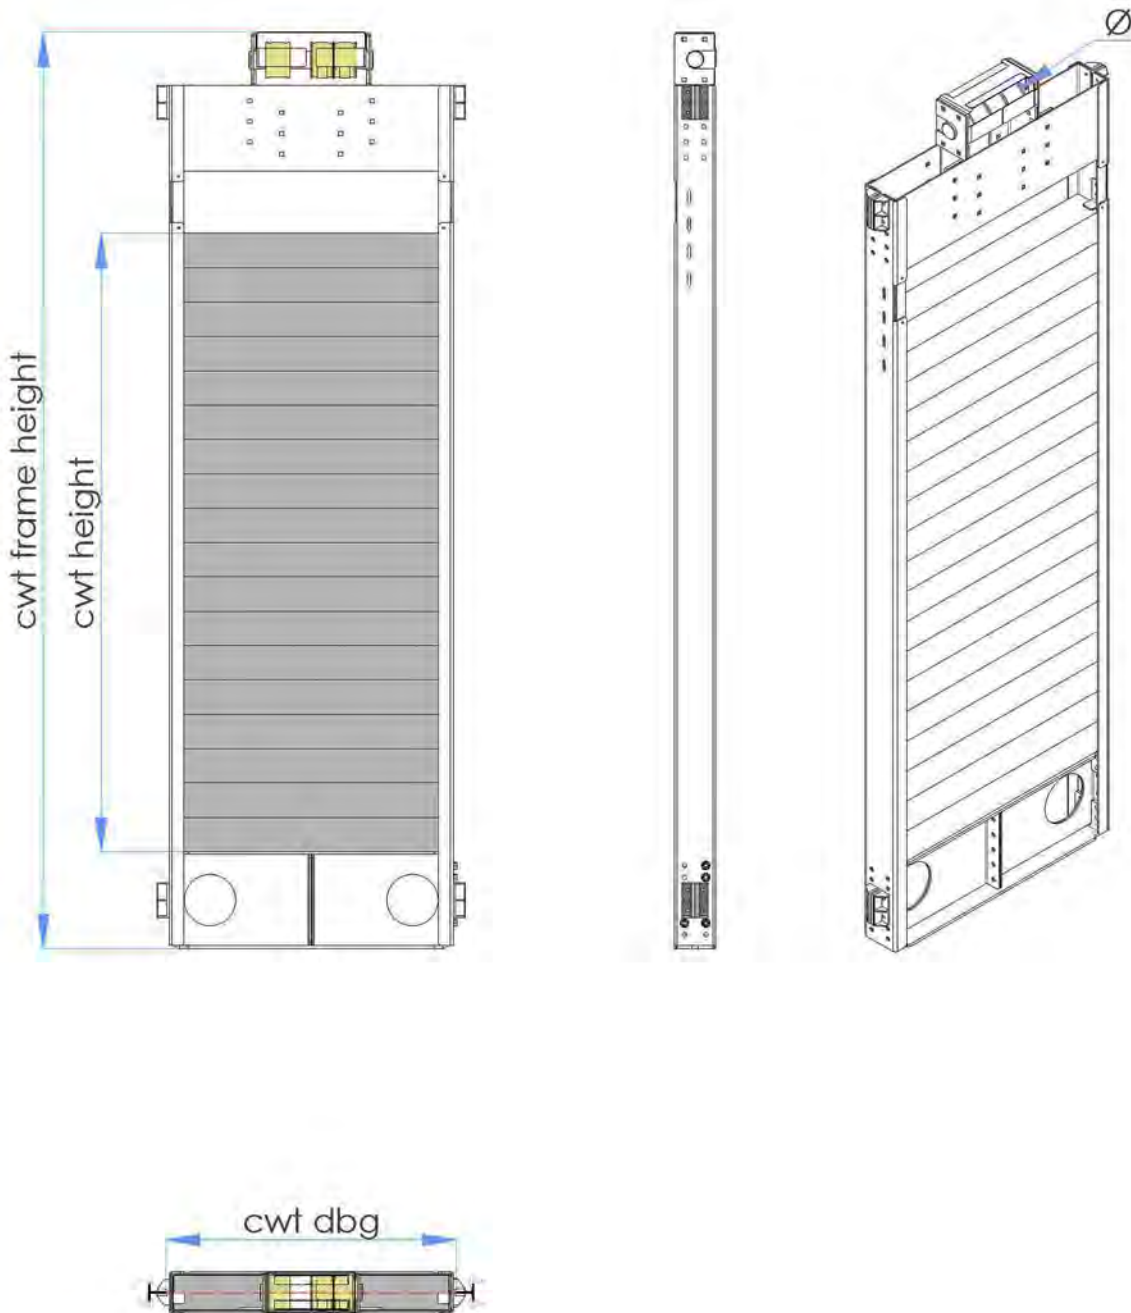

please check the dimensions at our technical tables.

1:1 single row

capacity	320 kg	400 kg	450 kg	630 kg	800 kg	1000 kg
no of passengers	4	5	6	8	10	13
CWT DBG [mm]	1010	1010	1010	1010	1010	1010
CWT length [mm]	960	960	960	960	960	960
CWT height [mm]	1920	2160	2400	2640	3000	2640
CWT frame height [mm]	2750	2990	3230	3470	3830	3470
channel x rope dia [mm]	5*Ø10	5*Ø10	5*Ø10	6*Ø8	8*Ø10	8*Ø10
CWT weight [kg] (approx.)	800	900	1000	1100	1250	1500

2:1 double row

capacity	1000kg	1275kg	1600kg	2000kg
no of passengers	13	17	20	26
CWT DBG [mm]	1010	1010	1010	1010
CWT length [mm]	960	960	960	960
CWT height [mm]	1800	2040	1680	2160
CWT frame height [mm]	2770	3010	2650	3130
pulley dia[mm] x channel x rope dia [mm]	Ø400*5*Ø10	Ø400*7*Ø10	Ø485*5*Ø12	Ø485*5*Ø12
CWT weight [kg] (approx.)	1500	1700	1950	2500

2:1 single row

capacity	320 kg	400 kg	450 kg	630 kg	800 kg	1000 kg
no of passengers	4	5	6	8	10	13
CWT DBG [mm]	1010	1010	1010	1010	1010	1010
CWT length [mm]	960	960	960	960	960	960
CWT height [mm]	1920	2160	2400	2640	3000	2640
CWT frame height [mm]	2890	3130	3370	3610	3970	3610
pulley dia[mm] x channel x rope dia [mm]	Ø240*5*Ø6.5	Ø240*5*Ø6.5	Ø240*5*Ø6.5	Ø240*7*Ø6.5	Ø240*8*Ø6.5	Ø240*10*Ø6.5
CWT weight [kg] (approx.)	800	900	1000	1100	1250	1500

2:1 single row belt

capacity	320 kg	400 kg	450 kg	630 kg	800 kg	1000 kg
no of passengers	4	5	6	8	10	13
CWT DBG [mm]	1010	1010	1010	1010	1010	1010
CWT length [mm]	960	960	960	960	960	960
CWT height [mm]	1920	2160	2400	2640	3000	2640
CWT frame height [mm]	2790	3030	3270	3510	3870	3510
pulley dia[mm] x channel x belt [mm]	Ø100*2*30	Ø100*2*30	Ø100*2*30	Ø100*3*30	Ø100*4*30	Ø100*4*30
CWT weight [kg] (approx.)	800	900	1000	1100	1250	1500